

Audio Control & Instrumentation Cable, 2C to 8C, 16AWG Unscreened, HFFR Sheath




C1712, C1714, C1716, C1718, C1720

Applications

Multi-Conductor cables suitable for Audio, Control, Instrumentation and Building Management Systems (BMS)

Cross Section Drawing

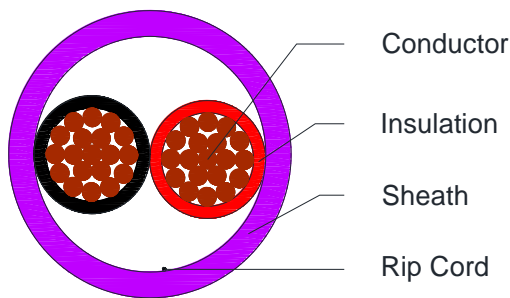

Design

Unit	Properties
Conductor	N x Bare Copper wire, 16AWG flexible
Insulation	HFFR Core 1: Black Core 2: Red Core 3: White Core 4: Green Core 5: Brown Core 6: Blue Core 7: Orange Core 8: Yellow
Rip Cord	Nylon Yarn
Sheath Material	Flame-Retardant Halogen Free (HFFR) Standard colour: Purple
Standard Put Up Length	305 meters

*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

Audio Control & Instrumentation Cable, 2C to 8C, 16AWG Unscreened, HFFR Sheath



C1712, C1714, C1716, C1718, C1720

Physical Characteristics

Part Number	C1712	C1714	C1716	C1718	C1720
No of cores x 16AWG (19 x 29)	2	3	4	6	8
Nom. Diameter Conductor (mm)	1.4				
Nom. Radial Thickness Insulation (mm)	0.25				
Nom. Radial Thickness Sheath (mm)	0.8				
Nom. Overall Diameter (mm)	5.4	5.7	6.2	7.3	7.9
Operating Temperature (°C)	-25 / +75				
Max. Recommended Pulling Tension (N)	260	390	520	780	1040
Min. Bend Radius (install) (mm)	54	57	62	73	79
Nominal Cable Weight (kg/km)	42	55.5	70.2	98.8	126.4

Electrical Characteristics

Part Number	C1712	C1714	C1716	C1718	C1720
No of cores x 16AWG (19 x 29)	2	3	4	6	8
Max. DC Resistance Conductor (Ω/km)	15.47				
Capacitance conductor to conductor (pF/m)	65	72	72	74	75
Nominal Inductance (μH/m)	0.5				
Max. Recom. Current @ 25°C (Amps)	6.25	6.25	5	4.35	4.35
Max. Operating Voltage (Vrms)	300				

Reference Standards

(BS) EN 50290-2
IEC 60228
IEC 60754-1 & 2
IEC 61034, IEC 60332-3-24
RoHS directives