

Low Capacitance RS-422 Computer Cables 24AWG, Shielded, LSZH Sheath




C5528, C5529, C5530, C5531, C5532

Applications

Building Management Systems (BMS), Access Control, Instrumentation.

Cross Section Drawing

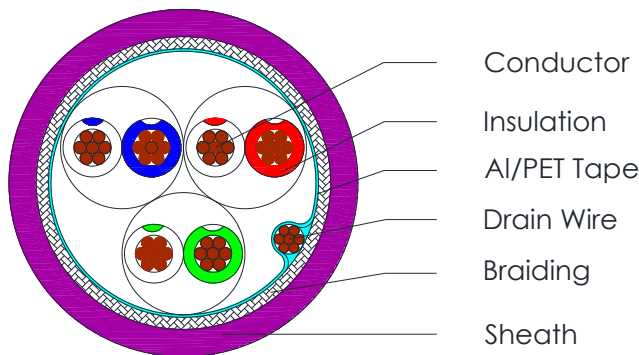

Design

Unit	Properties
Conductor	Tinned Copper Wires, Flexible
Insulation	Foam PE Pair 1: WHITE/Blue + BLUE/White Pair 2: WHITE/Orange + BLUE/White Pair 3: WHITE/Green + GREEN/White Pair 4: WHITE/Brown + BROWN/White Pair 5: WHITE/Grey + GREY/White Pair 6: RED/Blue + BLUE/Red
Screen	Aluminium/Polyester foil 115% Coverage
Drain Wire	Tinned Copper wire
Braiding	Tinned Copper wire
Sheath Material	Low Smoke Zero Halogen (LSZH) Standard colour: Purple
Standard Put Up Length	305 meters

*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

Low Capacitance RS-422 Computer Cables

24AWG, Shielded, LSZH Sheath



C5528, C5529, C5530, C5531, C5532

Physical Characteristics

Part Number	C5528	C5529	C5530	C5531	C5532
Number of pairs	1	2	3	4	6
Conductor size (AWG)	24(7 x 32)				
Nom. Diameter Insulation (mm)	1.24				
Drain wire size (AWG)	24(7 x 32)				
Braiding Coverage (%)	65				
Nom. Radial Thickness Sheath (mm)	0.60	0.90			
Nom. Overall Diameter (mm)	4.4	6.90	7.1	7.3	8.7
Operating Temperature (°C)	-30 / +80				
Max. Recommended Pulling Tension (N)	80	120	170	220	318
Min. Bend Radius (install) (mm)	44	69	72	73	87
Nominal Weight (kg/km)	19.3	41.8	58.0	62.4	80

Electrical Characteristics (at 20°C)

Part Number	C5528	C5529	C5530	C5531	C5532
No of pairs x 24AWG	1	2	3	4	6
Nominal Impedance (Ω)	100				
Max. DC Resistance Conductor (Ω /km)	82.7				
Max. DC Resistance Screen (Ω /km)	14.3				
Capacitance conductor to conductor (pF/m)	37	41	41	41	41
Capacitance cond. To other cond.+screen (pF/m)	76	73	73	73	73
Max. Recommended Current at 25°C (Amps)	1.8	1.8	1.5	1.5	1.5
Max. Operating Voltage (Vrms)	300				

Reference Standards

IEC 60228	IEC 60754-1&-2
IEC 60332-3-24	(BS)EN 50290-2
IEC 61034	RoHS directives